

DINESH PLASTIC PRODUCTS



PLANT SAFETY IS
JUST A QUESTION OF
PROPER TECHNOLOGY.

DPP SPLASH GUARD (Spray Shields)



Safety Shields also known as Splash guards are used in a variety of industries, where their primary application is the prevention of harmful spray-outs and mist formation from failing pipe joints, of toxic, corrosive and dangerous liquids such as acid, oil or steam.

Pipe joint failures have been responsible for a large number of high profile industrial incidents around the world. Acid, oil and steam jet spray-outs have resulted in many severe personal injuries, either directly or through consequent fires and explosions. Industry regulators have recognized the importance of shielding pipe joints (flanges, valves, couplings, hoses) to prevent jet leaks or the formation of explosive mist. Such spray-outs can have catastrophic effects, in many cases resulting in fire or explosions causing considerable plant down time, capital expenditure and even loss of life.

Safety or Spray Shields offer the last line of defence. They are not designed to contain the leak indefinitely; they are designed to control the leak safely allowing liquid release vertically. Ultimately, they prevent harmful spray out.

Not all spray shields are the same.

DESIGN

Circular cover with adjustable locking clip and flange fitting internal slotted ridge

MATERIAL

Imported Polypropylene PPH Grey, UV Stabilized


OPERATIONAL TEMPERATURE RANGE

-40°C to +115°C | Sizes: ½" up to 6"

FEATURES

Quick-Fit Installation, Easy Removal for Inspection, No Tools required, Superior Quality

MODEL OF SPLASH GUARD




SPLASH GUARD



SIMPLE & QUICK INSTALLATION

Installing SPLASHGUARDS safety shields is both simple and quick, requiring no tools. This shield designs are available in special imported PPH Grade with UV stabilized. It is made to fit specific joint/fitting types and sizes.




Note: Product Available in Grey Color Only.

DIMENSION DETAILS

Nominal Size (In mm)	For Flange Od (In mm)	Nominal Pressure	A Internal Slotted Ridge	B Ring Width
DN 25	108, 114, 121	PN 10	9	40
DN 40	127, 130, 133, 140	PN 10	9	40
DN 50	150, 152, 165	PN 10	10	40
DN 80	184, 191, 200, 203	PN 10	10	50
DN 100	216, 220, 229	PN 10	10	50

VALVE OR FLANGE SHIELD (PRECAUTIONS)

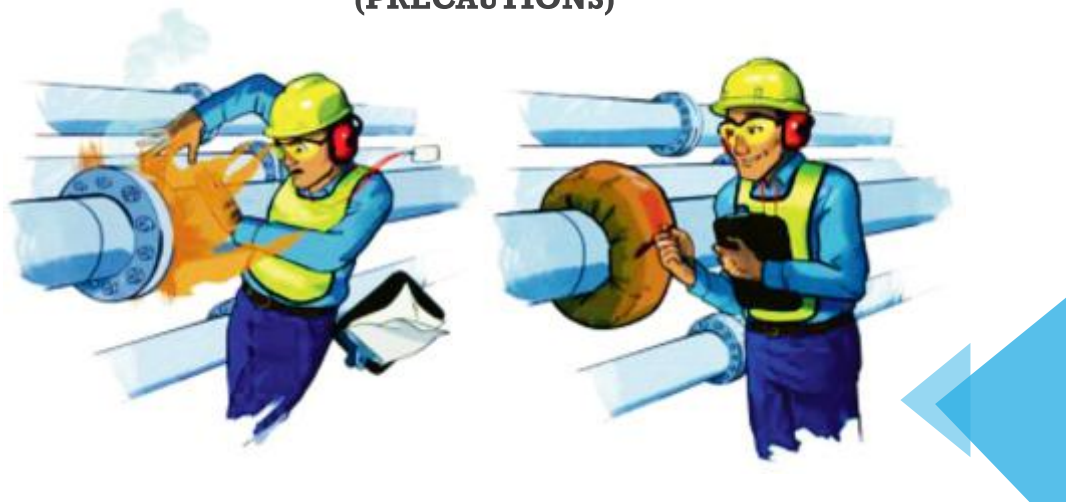

OUR REPRESENTATIVES LOCATION



OUR CUSTOMER LIKE OUR FAMILY MEMBER



... and many more

Manufacturer's Liability : Manufacture will not be liable for any property loss, damages or personal injury incidental or consequential damages of any kind whether based upon warranty, contract or negligence arising in connection with design, manufacture, sale and use of this product. No guarantee is claimed for the technical information contained in this catalog. It has been published for primary information purpose. It is necessary to carry out required tests before selecting the MOC for particular application. Specifications and dimensions are subject to change without notice due to, continuous research and development for technological improvement.

DINESH PLASTIC PRODUCTS

338/B, BEHIND GIDC, KABILPORE GANESH SISODRA,
NAVSARI – 396463, GUJARAT, INDIA.

P: +91 2637 270331, +91 2637 258668

E: dineshplastic@dppvalves.com | W : www.dppvalves.com